


# 计算节点配置时提示 “Cannot assign requested address: Service ‘sparkDriver’ failed after 16 retries (starting from 7777)!”

(本文档仅供参考)


## 问题描述:

在计算节点下检查配置时提示 “ Cannot assign requested address: Service ‘sparkDriver’ failed after 16 retries (starting from 7777)! Consider explicitly setting the appropriate port for the service ‘sparkDriver’ (for example spark.ui.port for SparkUI) to an available port or increasing spark.port.maxRetries.”

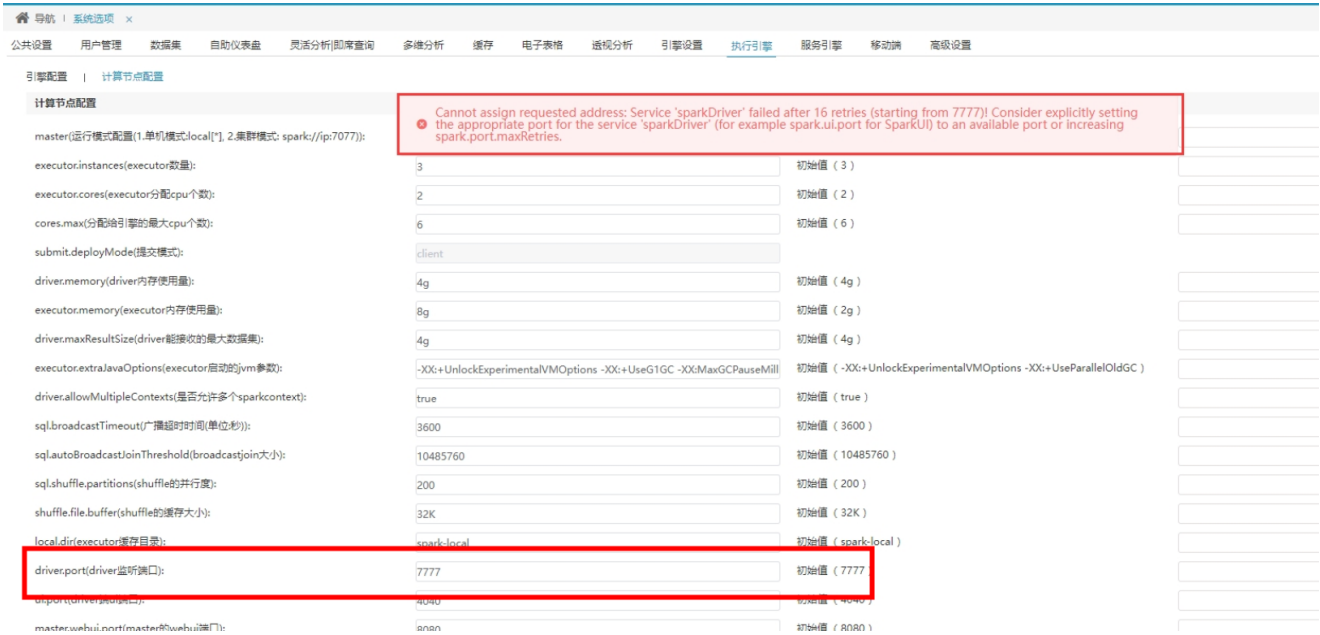


## 解决方案:

- 1. 检查端口是否被占用，使用netstat -an|grep driver监听端口。

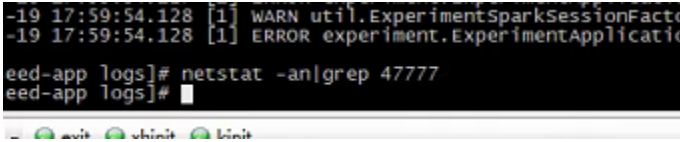

- 2. 查看引擎所在物理机主机名，是否包含特殊符号。

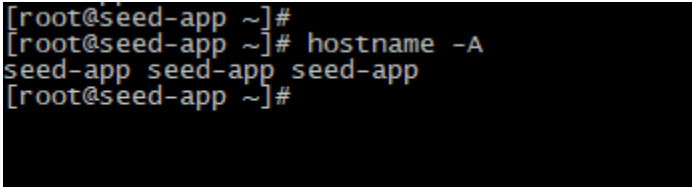

- 3. 若包含特殊符号，去掉特殊符号，尽量全英文，重启引擎。

```
[root@seed-app ~]# hostname -A
smartbi smartbi smartbi
[root@seed-app ~]# more /etc/hostname
smartbi
[root@seed-app ~]# more /etc/hosts
127.0.0.1    localhost localhost.localdomain localhost4 localhost4.localdomain4
::1        localhost localhost.localdomain localhost6 localhost6.localdomain6
# 10.130.18.226 seed-app
[root@seed-app ~]#
[root@seed-app ~]# more /etc/sysconfig/network
# Created by anaconda
[root@seed-app ~]#
[root@seed-app ~]#
```